

MaxPro1 D3000 PLUS is a range of high performance, multi-grade, heavy-duty diesel engine oils, specifically designed for diesel engines with and without turbo charging. They are used in passenger cars, trucks, buses and industrial equipment. These oils are blended from highly refined base stocks and with advanced additives.

APPLICATIONS

MaxPro1 D3000 PLUS oils are recommended for use in a wide range of diesel and petrol engines requiring API CH-4 (diesel) or SL (gasoline) performance lubricants.

MaxPro1 D3000 PLUS show exceptional durability and reliability performance, especially under demanding operating environments found in the on-road transport, off-road mining, construction and agricultural industries. Mid-ash, higher dispersancy formulation provides excellent overall performance in mixed fleets of different engine designs, allowing fewer oils to be stored.

FEATURES AND BENEFITS

- Reduced oil consumption.
- Minimal viscosity loss over long drain periods.
- Excellent engine cleanliness and wear protection
- Reduced bore glazing in stationary engines.
- Good oxidation and thermal stability.
- Outstanding detergency – dispersion to minimize carbon, varnish, lacquer and sludge.

D3000 PLUS

HIGH PERFORMANCE
HEAVY DUTY TURBO
DIESEL ENGINE OIL



Revision 23/09/15 Superseding
issue of

D3000 PLUS

HIGH PERFORMANCE
HEAVY DUTY TURBO
DIESEL ENGINE OIL

PERFORMANCE LEVEL

It meets the performance requirements of:

- SAE Grade 15W40, 20W50
- ACEA E2, E3, E5
- API CH-4/ CG-4/CF-4/CF/ SL/SJ
- MB-Approval 228.3
- MAN 271


TYPICAL PHYSICAL CHARACTERISTICS

SAE grade	Test Method	15W-40	20W-50
Product Code		2065	2066
ASTM Colour	ASTM D1500	L3.5	L3.5
Density@ 15°C , kg/l	ASTM D1298	0.8703	0.8736
Viscosity, kinematic			
at 40°C , cSt	ASTM D445	111.96	169.06
at 100°C , cSt	ASTM D445	15.13	19.89
Viscosity index	ASTM D2270	141	136
Flash point , °C	ASTM D92	230	>230
Pour point , °C	ASTM D97	-30	-27
TBN , Mg KOH/g	ASTM D2890	12.06	12.06

The information provided is to our best knowledge, true & accurate, subjected to change without notification due to continual product research and development.

Available Size & Part Number

	4L	5L	18L	200L
D3000+ SAE 15W-40	2065-04		2065-18	2065-200
D3000+ SAE 20W-50		2066-05	2066-18	2066-200

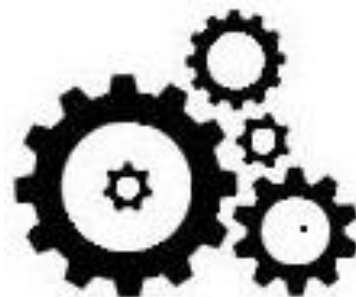

Revision 23/09/15 Superseding
issue of