

MaxPro1 ATF MV PLUS is formulated with synthetic blend base stocks, combined with unique seal conditioners, long-life friction modifiers, special anti-wear additives, and shear stable viscosity modifiers, to address the multi vehicle needs of a universal Automatic Transmission fluid. Specially designed to deliver performance and maximum fuel efficiency for modern automatic transmissions. It is suitable for many transmissions manufactured by European, Asian and OEMs.

APPLICATIONS

MaxPro1 ATF MV PLUS is recommended to give trouble free performance, to address the four major causes of transmission breakdown: leaks, slippage, shudder and gear wear.

This product will offer excellent shifting performance and anti-shudder durability that require for a SP-IV type fluid, as well as it can be use in Alpha Romeo, Fiat, Renault, SAAB and Volkswagon that required Dexron VI type fluid for some models. Suitable for use in vehicles requiring:

- Hyundai / Kia SP-IV
- Nissan Matic-S
- Mercedes Benz: 236.12/
236.14
- Dexron®-VI
- Ford Mercon® LV
- Toyota Type W



NOTE: Not recommended for CVT, DCT transmissions or Ford Type F, when a non-friction modified fluid is recommended. Always consult the vehicle owner's manual for specific transmission fluid recommendations.

FEATURES AND BENEFITS

- Improves and maintains smooth shifting longer than conventional automatic transmission fluids.
- Superior anti-shudder performance.
- Excellent oxidation resistance and thermal stability for long fluid life.

ATF MV PLUS

SYNTHETIC-BLEND
TRANSMISSION FLUID

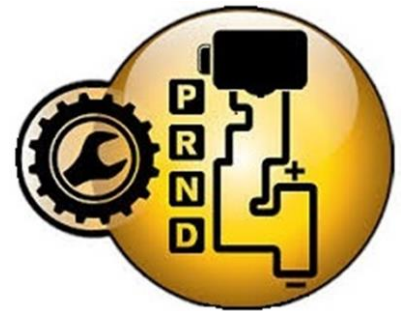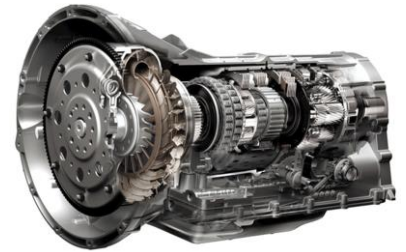

Revision 23/09/15 Superseding
issue of

- Protects against sludge and varnish formation.
- Protects against wear, rust and corrosion.
- Good seal compatibility.
- Provides excellent flow properties at low temperatures and greater film protection at high temperatures.
- Maximizes the life of higher mileage transmissions.

TYPICAL PHYSICAL CHARACTERISTICS

	ATF MV PLUS
Product Code	3021
Appearance	Red
Viscosity @ 100°C, cSt	6.0
Viscosity @ 40°C, cSt	29.86
Viscosity Index	152
Specific Gravity @ 15°C	0.843
Flash Point, COC, °C	202
Pour Point, °C,	-48
Brookfield Viscosity @ -40°C, cP	10,000



The information provided is to our best knowledge, true & accurate, subjected to change without notification due to continual product research and development.

Available Size & Part Number

	1L	4L
ATF MV PLUS	3021-01	3021-04

ATF MV PLUS

SYNTHETIC-BLEND
TRANSMISSION FLUID

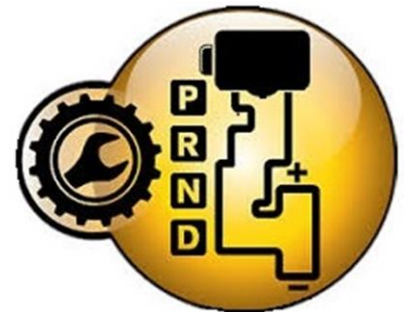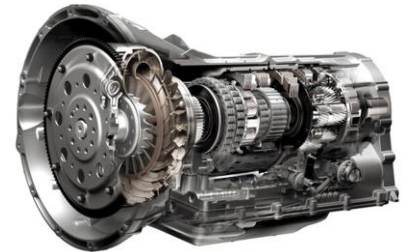

Revision 23/09/15 Superseding
issue of