

**MaxPro1 Powerdrive** series is a range of specially formulated tractor fluids for off-road applications. These multifunctional products can be used throughout the drivetrain and hydraulics, in a wide range of machinery.

**MaxPro1 Powerdrive** oils provide a precise, smooth and confident control over the machines. They carry multiple industry credentials. In addition, many field trial studies have been conducted in a variety of equipment with such a fluid, ensuring a safe and reliable performance.

---

## APPLICATIONS

**MaxPro1 Powerdrive** is recommended as a heavy-duty, universal tractor fluid for off-road applications where a high degree of satisfaction is required. These oils provide a balanced frictional characteristics for power shift transmission and wet brake applications. They can be used throughout the transmissions, hydraulics and final drives of a wide range of machines.

**MaxPro1 Powerdrive** oils are available in 3 popular grades; SAE 10W, SAE 30 and SAE 50.


---

## FEATURES AND BENEFITS

- Excellent wear protection and material compatibility
- Proper frictional properties for smooth shifting and minimises clutch slippage
- Compatible with engine oils, preventing potential damages if accidentally mixed with engine oil in crankcase or transmission
- Protects against sludge and varnish formation
- Protects against wear, rust and corrosion
- Reduces brake noise and chatter
- Good foam resistance

## POWER DRIVE

### OFF-ROAD POWER TRANSMISSION FLUIDS

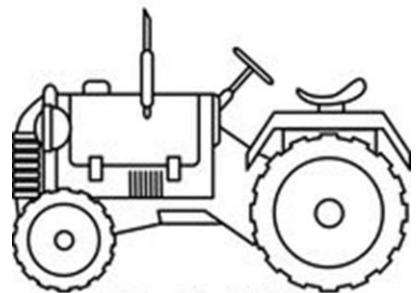

Revision 23/09/15 Superseding  
issue of

### PERFORMANCE LEVEL

- Allison C-4 (Powerdrive SAE 10W and SAE 30)
- Caterpillar TO-2
- Caterpillar TO-4
- Caterpillar TO-4M
- Komatsu KES 07.868.1
- API GL-4
- Sperry Vickers/Eaton M2950-S
- Sperry Vickers/Eaton I-280S


### TYPICAL PHYSICAL CHARACTERISTICS

SAE Grade		10W	30	50
Product Code		<b>3060</b>	<b>3061</b>	<b>3062</b>
<b>Test</b>	<b>Method</b>			
Appearance	Visual	Clear	Clear	Clear
Density @ 15°C, kg/l	ASTM D1298	0.865	0.878	0.895
Kinematic Viscosity,	ASTM D445			
@ 40°C, cSt		46.4	99.2	226
@ 100°C, cSt		6.2	11.2	19.3
Viscosity Index	ASTM D2270	100	98	97
Flash Point COC, °C	ASTM D92	222	230	242
Pour Point, °C	ASTM D97	-27	-21	-15

The information provided is to our best knowledge, true & accurate, subjected to change without notification due to continual product research and development.

### Available Size & Part Number

	18L	200L
<b>POWER DRIVE 10W</b>	<b>3060-18</b>	<b>3060-200</b>
<b>POWER DRIVE SAE 30</b>	<b>3061-18</b>	<b>3061-200</b>
<b>POWER DRIVE SAE 50</b>	<b>3062-18</b>	<b>3062-200</b>

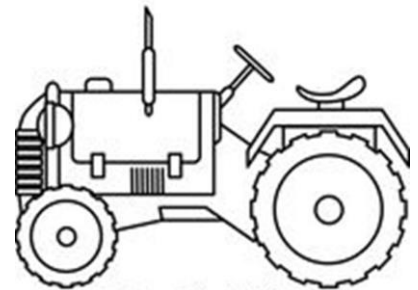

Revision 23/09/15 Superseding issue of